

To: X3T13

From: Tokuyuki Totani, Toshiba America Information systems

Date: January 23, 1996

subj: Use of pins A-D on 44-pin connector

Settings used by Toshiba drives.

No Jumper: Device 0 (Master)

A-B: Not Allowed


C-D: Device 1 (Slave)

D-B: Not Allowed.

C-A: Not Allowed.

Cable select is selected by internal EEPROM setting change.

Toshiba implementation of A-D pins are.

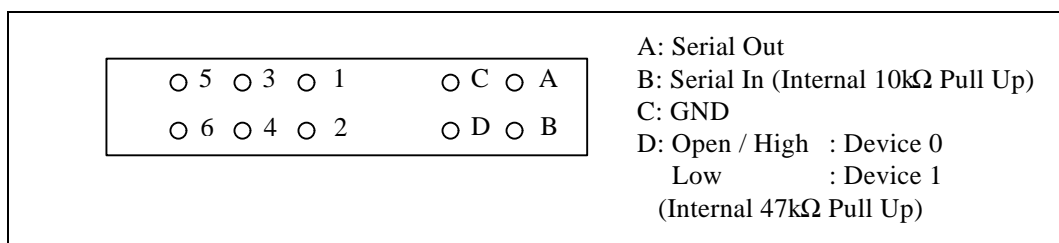

Toshiba is capable of implementing D-B as Cable Select.

Toshiba may implement A-B as Device 0 by taking this setting as No Jumper setting.

T.Totani