

# **Working Draft Project American National Standard**

**T13/1697-D**

**Revision 1  
August 16, 2007**

---

## **Information technology - AT Attachment 8 - ATA/ATAPI Serial Transport (ATA8-AST)**

This is a draft proposed American National Standard of Accredited Standards Committee INCITS. As such this is not a completed standard. The T10 Technical Committee may modify this document as a result of comments received during public review and its approval as a standard. Use of the information contained here in is at your own risk.

Permission is granted to members of INCITS, its technical committees, and their associated task groups to reproduce this document for the purposes of INCITS standardization activities without further permission, provided this notice is included. All other rights are reserved. Any commercial or for-profit replication or republication is prohibited.

T13 Technical Editors: Curtis E. Stevens & MLaden Luksic  
Western Digital Technologies, Inc.  
20511 Lake Forest Dr.  
Lake Forest, Ca. 9230  
USA

Telephone: 949-672-7933  
Email: Mladen.Luksic@wdc.com & Curtis.Stevens@wdc.com

---

Reference number  
ISO/IEC xxxx-xxx:200x  
ANSI INCITS \*\*\*-200x

## Points of Contact

### T13 Chair

Dan Colgrove  
Hitachi Global Storage Technologies  
2903 Carmelo Dr  
Henderson, NV 89502  
Tel: 702-614-6119  
Fax: 702-614-7955

### T13 Vice chair

Jim Hatfield  
Seagate Technology  
389 Disc Drive  
Longmont CO 80503  
Tel: 720-684-2120  
Fax: 720-684-2722

### INCITS Secretariat

NCITS Secretariat  
1250 Eye Street, NW Suite 200  
Washington, DC 20005  
Email: [INCITS@ITIC.ORG](mailto:INCITS@ITIC.ORG)  
Tel: 202-737-8888  
Fax: 202-638-4922

### T13 Reflector

See the T13 Web Site at <http://www.t13.org> for reflector information.

### T13 Web Site

<http://www.t13.org>

### T13 Anonymous FTP Site

<ftp.t13.org>

### Document Distribution

INCITS Online Store  
managed by Techstreet  
1327 Jones Drive  
Ann Arbor, MI 48105  
<http://www.techstreet.com/incits.html>  
Telephone: 1-734-302-7801  
or 1-800-699-9277  
Facsimile: 1-734-302-7811

or

Global Engineering  
15 Inverness Way East  
Englewood, CO 80112-5704  
<http://global.ihs.com/H>  
Telephone: 1-303-792-2181  
or 1-800-854-7179  
Facsimile: 1-303-792-2192

American National Standard  
for Information Technology

# Draft

Secretariat  
Information Technology Industry Council

Approved mm.dd.yy  
American National Standards Institute, Inc.

## ABSTRACT

This standard specifies the AT Attachment command set between host systems and storage devices. It provides a common command set for systems manufacturers, system integrators, software suppliers, and suppliers of intelligent storage devices. It includes the PACKET feature set implemented by devices commonly known as ATAPI devices. This standard maintains a high degree of compatibility with the AT Attachment Interface with Packet Interface - 7 (ATA/ATAPI-7) volume 1, INCITS 397-2004, and while providing additional functions, is not intended to require changes to devices or software that comply with previous T13 standards.

# Draft

## American National Standard

Approval of an American National Standard requires verification by ANSI that the requirements for due process, consensus, and other criteria for approval have been met by the standards developer. Consensus is established when, in the judgment of the ANSI Board of Standards Review, substantial agreement has been reached by directly and materially affected interests. Substantial agreement means much more than a simple majority, but not necessarily unanimity. Consensus requires that all views and objections be considered, and that effort be made towards their resolution.

The use of American National Standards is completely voluntary; their existence does not in any respect preclude anyone, whether he has approved the standards or not, from manufacturing, marketing, purchasing, or using products, processes, or procedures not conforming to the standards.

The American National Standards Institute does not develop standards and will in no circumstances give interpretation on any American National Standard. Moreover, no person shall have the right or authority to issue an interpretation of an American National Standard in the name of the American National Standards Institute. Requests for interpretations should be addressed to the secretariat or sponsor whose name appears on the title page of this standard.

**CAUTION NOTICE:** This American National Standard may be revised or withdrawn at any time. The procedures of the American National Standards Institute require that action be taken periodically to reaffirm, revise, or withdraw this standard. Purchasers of American National Standards may receive current information on all standards by calling or writing the American National Standards Institute.

[The patent statement goes here.](#)

[If no patents have been disclosed place the statement in 5.5.2 shall be used.](#)

[If any patents have been disclosed place the statement in 5.5.3 shall be used.](#)

Published by

**American National Standards Institute**  
**11 W. 42nd Street, New York, New York 10036**

Copyright © 2006 by Information Technology Industry Council (ITI).  
All rights reserved.

No part of this publication may be reproduced in any form, in an electronic retrieval system or otherwise, without prior written permission of ITI, 1250 Eye Street NW, Suite 200, Washington, DC 20005.

Printed in the United States of America

**Document Status**

Document e07171 is the issues list for this draft. e07171 contains a list of the issues associated with the document, an issue number that remains assigned to the issue for the life of document development, a resolution to the issue, an owner for the issue, and a disposition for the issue. All major changes associated with this draft starting with Rev 1 are first documented in e07171 and given a number. This includes proposals which are targeted for inclusion into this draft.

Revision History		
Rev	Date	Description
1	August 16, 2007	1) Used ATA8-ACSr4b as a template to port ATA8-ASTr0 + Changes to this version. This version should be taken as the initial proposal...

**New Capabilities added to ATA8-ACS**

Integrated Proposal List		
#	Doc	Description
1		
2		
3		
4		
5		
6		
7		
8		
9		
10		
11		
12		
13		
14		
15		
16		
17		
18		
19		
20		



**Contents**

	Page
Points of Contact.....	ii
Document Status .....	v
New Capabilities added to ATA8-ACS.....	v
Contents.....	xiii
Tables .....	xv
Figures .....	xvii
Foreword.....	xix
Introduction .....	xix
1 Scope .....	1
2 Normative references .....	2
2.1 Approved references .....	2
2.2 References under development .....	2
2.3 Other references .....	3
3 Definitions, abbreviations, and conventions .....	4
3.1 Definitions and abbreviations .....	4
3.2 Conventions .....	7
3.2.1 Overview .....	7
3.2.2 Precedence .....	8
3.2.3 Lists .....	8
3.2.4 Keywords .....	8
3.2.5 Numbering .....	9
3.2.6 Bit conventions .....	9
3.2.7 State diagram conventions .....	9
3.2.8 Byte, word, DWord, and QWord Relationships .....	10
3.2.9 ATA string convention .....	12
4 Mapping ATA Command Structure and Command Outputs into the Serial ATA transport .....	13
4.1 Mapping ATA8 Command Structure into an RHD FIS .....	13
4.2 Mapping ATA8 Normal Outputs and Error Outputs into a RDH FIS .....	14
4.3 Mapping ATA8 Normal Outputs and Error Outputs into a SDB FIS .....	14
Annex A (Normative) Place Holder Annex.....	17
A.1 Overview .....	17





**Tables**

	Page
Table 1 - Approved ANSI References.....	2
Table 2 - References Under Development .....	3
Table 3 - ATA string byte swapping .....	12
Table 4 - ATA firmware revision example .....	12
Table 5 - 28-Bit Command Mapping .....	13
Table 6 - 48-Bit Command Mapping .....	13
Table 7 - 28-Bit Normal/Error Mapping .....	14
Table 8 - 48-Bit Normal/Error Mapping .....	14
Table 9 - 48-Bit Queue Aborted Mapping .....	14
Table A.1 - Sample Table .....	17



## Figures

	Page
Figure 1 - ATA document relationships.....	1
Figure 2 - State diagram convention.....	9
Figure 3 - Byte, word, DWord and QWord relationships.....	10



## Foreword

(This foreword is not part of this standard.)

Requests for interpretation, suggestions for improvement and addenda, or defect reports are welcome. They should be sent to the INCITS Secretariat, ITI, 1250 Eye Street, NW, Suite 200, Washington, DC 20005-3922.

This standard was processed and approved for submittal to ANSI by InterNational Committee for Information Technology Standards (INCITS). Committee approval of this standard does not necessarily imply that all committee members voted for approval. At the time it approved this standard, INCITS had the following members:

Karen Higginbottom, Chair

David Michael, Vice-chair

Monica Vago, Secretary

Technical Committee T13 on ATA Interfaces, that reviewed this standard, had the following members and additional participants:

Dan Colegrove, Chairman

Jim Hatfield, Vice-Chairman

Mark Overby, Secretary

**[Editors Note: Insert T13 Membership List Here]**

## Introduction

This standard encompasses the following:

Clause 1 describes the scope.

Clause 2 provides normative references for the entire standard.

Clause 3 provides definitions, abbreviations, and conventions used within the entire standard.

Clause 4 described how to map structures into the Serial ATA transport



# AT Attachment 8 - ATA/ATAPI Serial Transport (ATA8-AST)

## 1 Scope

The set of AT Attachment standards consists of this standard and the ATA implementation standards described in AT Attachment - 8 ATA/ATAPI Architecture Model ATA8-AAM. The scope of this standard is strictly limited the description of the mapping of ATA command structures, ATA command status (see ref. ATA8-ACS), ATA architecture model (see ref. ATA8-AAM), and ATA protocol model (see ref. ATA8-AAM) into the paradigm of the Serial ATA transport (see ref. Serial ATA Revision 2.6). The actual description of the Serial ATA transport, including, but not limited to, the description of:

- a) the physical interconnection between Serial ATA host and Serial ATA storage device(s), including connectors and cables;
- b) the electrical characteristics of the interconnecting signals;
- c) the logical characteristics of the interconnecting signals; or
- d) the protocols for transporting ATA commands, data, and status information using Serial ATA transport

is not within the scope of this standard.

Figure 1 shows the relationship of this standard to the other standards and related projects in the ATA and SCSI families of standards and specifications.

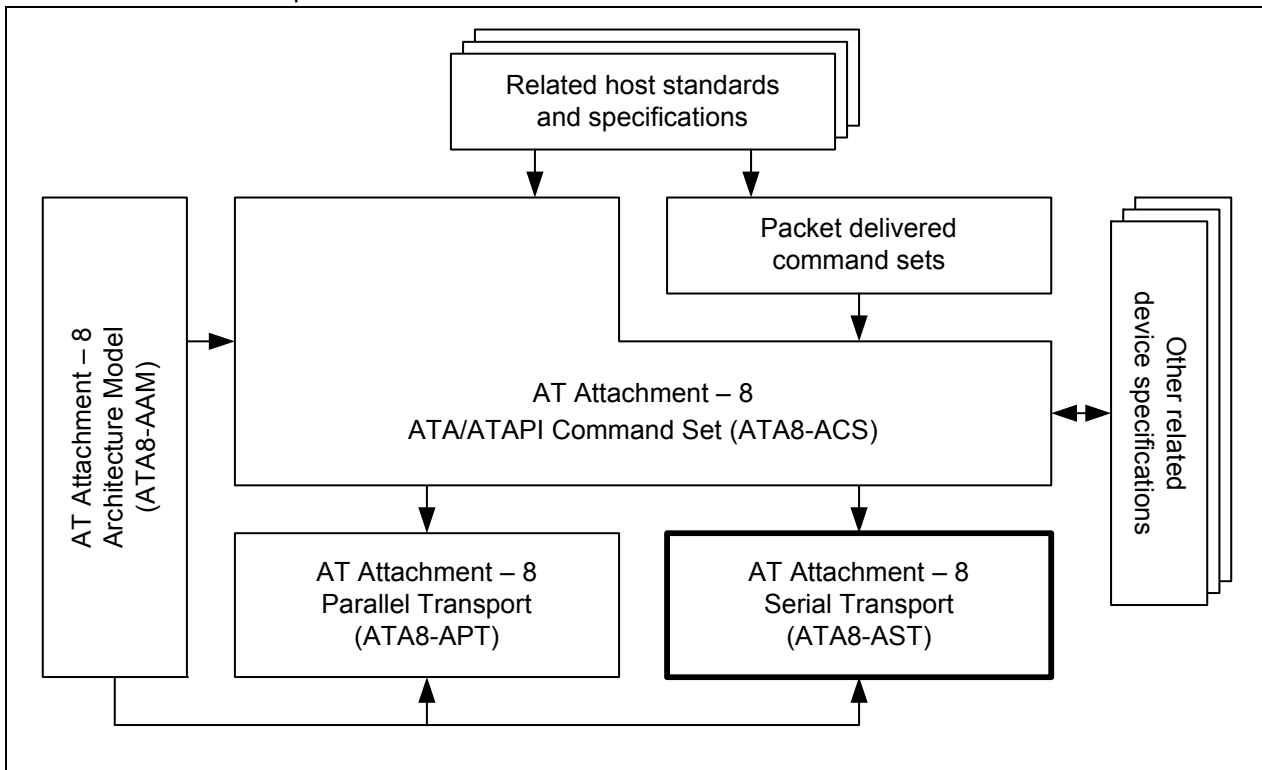


Figure 1 — ATA document relationships

## 2 Normative references

The following standards contain provisions that, through reference in the text, constitute provisions of this standard. At the time of publication, the editions indicated were valid. All standards are subject to revision, and parties to agreements based on this standard are encouraged to investigate the possibility of applying the most recent editions of the standards listed below.

Copies of the following documents may be obtained from ANSI: Approved ANSI standards, approved and draft international and regional standards (ISO, IEC, CEN/CENELEC, ITUT), and approved and draft foreign standards (including BSI, JIS, and DIN). For further information, contact ANSI Customer Service Department at 212-642-4900 (phone), 212-302-1286 (fax), or via the World Wide Web at <http://www.ansi.org>.

Additional availability contact information is provided below as needed.

### 2.1 Approved references

Table 1 lists approved ANSI standards, approved international and regional standards (ISO, IEC, CEN/CENELEC, ITUT), may be obtained from the international and regional organizations who control them. To obtain copies of these documents, contact Global Engineering or INCITS. Additional information may be available at <http://www.t10.org> and <http://www.t13.org>

**Table 1 — Approved ANSI References**

Name	Reference
Protected Area Run Time Interface Extensions (PARTIES)	ANSI INCITS 346-2001
AT Attachment with Packet Interface Extension (ATA/ATAPI-4)	ANSI INCITS 317-1998
AT Attachment with Packet Interface Extension (ATA/ATAPI-5)	ANSI INCITS 340-2000
AT Attachment with Packet Interface Extension (ATA/ATAPI-6)	ANSI INCITS 361-2002
AT Attachment with Packet Interface Extension (ATA/ATAPI-7)	ANSI INCITS 397-2005 ISO/IEC 14776-971
Time Limited Commands (TLC)	ANSI INCITS TR37-2004
SMART Command Transport (SCT)	ANSI INCITS TR38-2005
Address Offset Alternate Boot Feature	ANSI INCITS TR27-2001
Acoustics – Measurement of airborne noise emitted by information technology and telecommunications equipment	ISO/IEC 7779:1999(E)
SCSI Primary Commands - 3 (SPC-3)	ANSI INCITS 408-2005 ISO/IEC 14776-453
Information Systems - Coded Character Sets - 7-Bit American National Standard Code for Information Interchange (7-Bit ASCII)	ANSI INCITS 4-1986 (R2002)

### 2.2 References under development

At the time of publication, the following referenced standards were still under development. For information on the current status of the document, or regarding availability, contact the relevant standards body or other organization as indicated.



**Table 2 — References Under Development**

Name	Project Number
AT Attachment-8 - Parallel Transport (ATA8-APT)	INCITS 1698D ISO/IEC 14776-881
AT Attachment-8 – ATA/ATAPI Architecture Model (ATA8-AAM)	INCITS 1700D ISO/IEC 14776-861
Method to Disable Data Transfer after Error Technical Report	INCITS 1825DT
AT Attachment-8 – ATA Command Set (ATA8-ACS)	INCITS 1699D
ATA/ATAPI-7 Amendment 1	ANSI INCITS.397-2005/AM 1-2006 ISO/IEC 14776-971? INCITS T13/e05108
Host Bus Adapter – 2 (HBA-2)	INCITS 2014D

For more information on the current status of the T10 documents, contact INCITS. To obtain copies of T10 or SFF documents, contact Global Engineering.

### 2.3 Other references

The following standards and specifications are also referenced.

Serial ATA revision 2.6 (SATA 2.6)

For the SATA 2.6 specification published by SATA-IO, contact them at <http://www.sata-io.org>

Smart Media ATA Command Extension

For the Smart Media ATA Command Extension, contact the Solid State Floppy Disk Forum at <http://www.ssfcd.or.jp>

## 3 Definitions, abbreviations, and conventions

### 3.1 Definitions and abbreviations

- 3.1.1 **28-bit command:** A command which uses Features (7:0), Count (7:0), LBA (27:0), Device (15:8) and Command (7:0) to specify its arguments.
- 3.1.2 **48-bit command:** A command which uses Features (15:0), Count (15:0), LBA (47:0), Device (15:8) and Command (7:0) to specify its arguments.
- 3.1.3 **ASCII:** American Standard Code for Information Interchange.
- 3.1.4 **ASCII Character:** A byte containing a 7-bit ASCII pattern in bits 6:0 with bit 7 cleared to zero.
- 3.1.5 **acoustics:** Measurement of airborne noise emitted by information technology and telecommunications equipment [ISO 7779:1999(E)].
- 3.1.6 **ATA device:** A device implementing the General feature set.
- 3.1.7 **ATA8-ACS device:** A device that complies with this standard.
- 3.1.8 **ATAPI (AT Attachment Packet Interface) device:** A device implementing the PACKET feature set.
- 3.1.9 **AV (Audio-Video):** Audio-Video applications use data that is related to video images and/or audio. The distinguishing characteristic of this type of data is that accuracy is of lower priority than timely transfer of the data.
- 3.1.10 **Background Activities:** Activities initiated by a command that occur after command completion has been reported.
- 3.1.11 **BIOS (Basic Input/Output System):** An initial application client run by a computer when power is applied. The primary function of BIOS is initialize various components of the system, including storage devices.
- 3.1.12 **Block Data:** Block Data is the data transferred to or from the device using SCT read/write log capabilities.
- 3.1.13 **byte:** A sequence of eight contiguous bits considered as a unit. See 3.2.8.
- 3.1.14 **cache:** A data storage area outside the area accessible by application clients that may contain a subset of the data stored in the non-volatile data storage area.
- 3.1.15 **check condition:** For ATAPI devices, this indicates an error or exception condition has occurred.
- 3.1.16 **CHS (cylinder-head-sector):** An obsolete method of addressing the data on the device by cylinder number, head number, and sector number.
- 3.1.17 **command aborted:** Command completion with ERR set to one in the Status field and ABRT set to one in the Error field.
- 3.1.18 **command acceptance:** Positive acknowledgement of a command being received by a device. See the appropriate transport standard for a definition of positive acknowledgement.
- 3.1.19 **Command Block:** In a parallel implementation this is the set of interface registers used for delivering commands to the device or posting status from the device. In a serial implementation, the command block fields are FIS payload fields.
- 3.1.20 **command completion:** The completion by the device of the action requested by the command or the termination of the command with an error, the setting of the appropriate bits in the Error field, and the setting of the appropriate bits in the Status field.
- 3.1.21 **command packet:** A data structure transmitted to the device during the execution of a PACKET command that includes the command and command parameters.
- 3.1.22 **command released:** When a device supports the TCQ feature set, a command is considered released when a release occurs before command completion.

- 3.1.23 **device:** A storage-related peripheral. Traditionally, a device on the interface has been a hard disk drive, but any form of storage device may be placed on the interface provided the device adheres to this standard.
- 3.1.24 **DMA (direct memory access) data transfer:** A means of data transfer between device and host memory without host processor intervention.
- 3.1.25 **DRQ data block:** A unit of data words associated with available status when using either the PIO data-in command protocol or the PIO data-out command protocol.
- 3.1.26 **DWord:** A sequence of four contiguous bytes considered as a unit. See 3.2.8.
- 3.1.27 **FIS:** The Frame Information Structure for the serial interface.
- 3.1.28 **hardware reset:** the routine performed by a device after a hardware reset event as defined in ATA8-AAM. The hardware reset routine performed by the device includes the actions performed by the device for a software reset, and the actions defined in ATA8-AAM, this standard, and the applicable transport standards.
- 3.1.29 **host:** The computer system executing the application client (e.g., BIOS, operating system, or device driver) controlling the device and the adapter hardware for the ATA interface to the device.
- 3.1.30 **host adapter:** The implementation of the host transport, link, and physical layers.
- 3.1.31 **LBA (logical block address):** The value used to reference a logical sector.
- 3.1.32 **logical sector:** A set of logical words accessed and referenced as a unit (see IDENTIFY DEVICE data words 118:117). These units are referenced by LBA (see 3.1.31).
- 3.1.33 **log:** A collection of data accessed using log commands.
- 3.1.34 **log address:** A numeric value that a log command uses to identify a specific log.
- 3.1.35 **log command:** A SMART READ LOG command, SMART WRITE LOG command, or GPL feature set command.
- 3.1.36 **log page:** A unit of measure for determining the size of a log. Each log page is a 512-byte block of data. A log consists of one or more pages.
- 3.1.37 **LSB (least significant bit):** In a binary code, the bit or bit position with the smallest numerical weighting in a group of bits that, when taken as a whole, represent a numerical value (e.g., in the number 0001b, the bit that is set to one).
- 3.1.38 **Master Password Capability:** The Master Password Capability indicates whether or not the Master password may be used to unlock the device. This was formerly know as "Security Level".
- 3.1.39 **Media:** The material on which data is stored.
- 3.1.40 **Media Access Command:** Any command which causes the device to access non-volatile media.
- 3.1.41 **MSB (most significant bit):** In a binary code, the bit or bit position with the largest numerical weighting in a group of bits that, when taken as a whole, represent a numerical value (e.g., in the number 1000b, the bit that is set to one).
- 3.1.42 **native max address:** The highest LBA that a device accepts in the factory default condition, that is, the highest LBA that is accepted by the SET MAX ADDRESS or, if the native max is greater than 28 bits then SET MAX ADDRESS EXT.
- 3.1.43 **Non-Volatile cache:** Cache that retains data through all power and reset events. Non-volatile cache shall be a subset of the non-volatile media.
- 3.1.44 **Non-Volatile Media:** Physical storage media that retains data written to it for subsequent read operations through all power and reset events (e.g., magnetic media, optical media, flash media).
- 3.1.45 **NV Cache Pinned Set:** The set of logical blocks that have been made un-removable from the NV Cache by the host. Writes to logical blocks represented in the NV Cache Pinned Set always results in valid data in the NV Cache Set.
- 3.1.46 **NV Cache Set:** The set of logical blocks currently represented in the device's entire NV Cache.

- 3.1.47 NV Cache Set Data:** A data structure representing the standard format of transmitting logical blocks in the form of a list of LBA Range Entries.
- 3.1.48 NV Cache Unpinned Set:** The set of logical blocks that are represented in the NV Cache Set but not represented in the NV Cache Pinned Set. The NV Cache Pinned Set and the NV Cache Unpinned Set are mutually exclusive. NV Cache Unpinned Set is completely managed by the device and logical blocks represented in the NV Cache Unpinned Set may be added or removed from the NV Cache Set at any time.
- 3.1.49 Password Attempt Counter Exceeded:** There were too many attempts to unlock the device with an incorrect password. This is a name associated with IDENTIFY DEVICE, word 128, bit 4.
- 3.1.50 PATA:** A device implementing the parallel transport, see ATA8-APT
- 3.1.51 physical sector:** One or more contiguous logical sectors that are read from or written to the device media in a single operation.
- 3.1.52 PIO (programmed input/output) data transfer:** PIO data transfers are performed using PIO commands and protocol.
- 3.1.53 power cycle:** the period from when power is removed from a host or device until the subsequent power-on event (see ATA8-AAM).
- 3.1.54 power-on reset:** the host specific routine performed by the host or the routine performed by a device after detecting a power-on event. The power-on reset routine performed by a device includes the actions performed by the device for a hardware reset and a software reset, and the actions defined in ATA8-AAM, this standard, and the applicable transport standards.
- 3.1.55 queued:** Command queuing allows the host to issue concurrent commands to the same device. Only commands included in the Tagged Command Queuing (TCQ) feature set may be queued. In this standard, the queue contains all commands for which command acceptance has occurred but command completion has not occurred.
- 3.1.56 Queued Command:** A NCQ command that has reported command acceptance but not command completion.
- 3.1.57 QWord:** A sequence of eight contiguous bytes considered as a unit. See 3.2.8.
- 3.1.58 read command:** A command that causes the device to transfer data from the device to the host. The following commands are read commands: READ DMA, READ DMA EXT, READ DMA QUEUED, READ DMA QUEUED EXT, READ FPDMA QUEUED, READ MULTIPLE, READ MULTIPLE EXT, READ SECTOR(S), READ SECTOR(S) EXT, READ STREAM DMA, READ STREAM DMA EXT, READ VERIFY SECTOR(S), or READ VERIFY SECTOR(S) EXT.
- 3.1.59 release:** The action by a device implementing the TCQ feature set that allows a host to select an alternate device or deliver another queued command.
- 3.1.60 SATA:** A device implementing the serial transport, see ATA8-AST
- 3.1.61 sector:** See logical sector.
- 3.1.62 Security Is Disabled:** The Security feature set is supported, but there is no valid User password. There is a Master password. Access to user data is not restricted by the Security feature set. The terms 'Security Is Locked' and 'Security Is Unlocked' are not applicable. (e.g., Security states SEC0, SEC1, SEC2).
- 3.1.63 Security Is Enabled:** The Security feature set is supported, and a valid User password has been set. (e.g., Security states SEC3, SEC4, SEC5, SEC6).
- 3.1.64 Security Is Frozen:** Security may be either enabled or disabled. Changes to Security states are not allowed until after the next power-on or hardware reset. (e.g., Security states SEC2, SEC6).
- 3.1.65 Security Is Locked:** Security is enabled. In addition, access to the device is restricted. (e.g., Security state SEC4).
- 3.1.66 Security Is Not Frozen:** Security may be either enabled or disabled. Changes to Security states are allowed (e.g., Security states SEC1, SEC4, SEC5).
- 3.1.67 Security Is Unlocked:** Security is enabled. A SECURITY UNLOCK command was successful, allowing access to the device. (e.g., Security state SEC5, SEC6).

- 3.1.68 Security Level:** See Master Password Capability.
- 3.1.69 signature:** A unique set of values placed in the return parameters used to distinguish command sets (e.g., General, ATAPI device, Port Multiplier).
- 3.1.70 software reset:** the routine performed by a device after a software reset event as defined in ATA8-AAM. The software reset routine includes the actions defined in ATA8-AAM, this standard, and the applicable transport standards.
- 3.1.71 spin-down:** the process of bringing a rotating media device's media to a stop.
- 3.1.72 spin-up:** the process of bringing a rotating media device's media to operational speed.
- 3.1.73 Spindle State:** The current state of the device's rotational media. There are two possible states: spun up/spinning up and spun down/spinning down.
- 3.1.74 Stream:** a set of operating parameters specified by a host using the CONFIGURE STREAM command to be used for subsequent READ STREAM commands and WRITE STREAM commands.
- 3.1.75 TCG:** Trusted Computing Group: An organization that develops and promotes open standards for hardware-enabled trusted computing and security technologies. See <https://www.trustedcomputinggroup.org> for more information.
- 3.1.76 TCQ (Tagged Command Queuing):** TCQ feature set.
- 3.1.77 transport:** The mechanism used to communicate with a device. See ATA8-APT and ATA8-AST.
- 3.1.78 unaligned write:** A write command that does not start at the first logical sector of a physical sector or does not end at the last logical sector of a physical sector.
- 3.1.79 unrecoverable error:** When the device sets either the ERR bit or the DF bit to one in the Status field at command completion.
- 3.1.80 Volatile Cache:** Cache that does not retain data through power cycles.
- 3.1.81 VS (vendor specific):** Bits, bytes, fields, and code values that are reserved for vendor specific purposes. These bits, bytes, fields, and code values are not described in this standard, and implementations may vary among vendors. This term is also applied to levels of functionality whose definition is left to the vendor.
- 3.1.82 word:** A sequence of two contiguous bytes considered as a unit. See 3.2.8.
- 3.1.83 write command:** A command that causes the device to transfer data from the host to the device. The following commands are write commands: WRITE DMA, WRITE DMA EXT, WRITE DMA FUA EXT, WRITE DMA QUEUED, WRITE DMA QUEUED EXT, WRITE DMA QUEUED FUA EXT, WRITE FPDMA QUEUED, WRITE MULTIPLE, WRITE MULTIPLE EXT, WRITE MULTIPLE FUA EXT, WRITE SECTOR(S), WRITE SECTOR(S) EXT, WRITE STREAM DMA EXT, or WRITE STREAM EXT.
- 3.1.84 WWN (world wide name):** A 64-bit worldwide unique name based upon a company's IEEE organizationally unique identifier (OUI), reported in IDENTIFY DEVICE data words 108-111 and IDENTIFY PACKET DEVICE data words 108-111

## 3.2 Conventions

### 3.2.1 Overview

Lowercase is used for words having the normal English language meaning. Certain words and terms used in this standard have a specific meaning beyond the normal English language meaning. These words and terms are defined either in clause 3 or in the text where they first appear.

The names of abbreviations, commands, fields, and acronyms used as signal names are in all uppercase (e.g., IDENTIFY DEVICE). Fields containing only one bit are usually referred to as the "name" bit instead of the "name" field. (See 3.2.6 for the naming convention used for naming bits.)

Names of device fields begin with a capital letter (e.g., Count).

The expression "word n" or "bit n" shall be interpreted as indicating the content of word n or bit n.

### 3.2.2 Precedence

If there is a conflict between text, figures, and tables, the precedence shall be tables, figures, then text.

### 3.2.3 Lists

Unordered lists, those lists describing a sequence, are of the form:

- a)
- b)
- c)

Ordered list are of the form:

- 1)
- 2)
- 3)

### 3.2.4 Keywords

Several keywords are used to differentiate between different levels of requirements and options.

**3.2.4.1 expected:** A keyword used to describe the behavior of the hardware or software in the design models assumed by this standard. Other hardware and software design models may also be implemented.

**3.2.4.2 mandatory:** A keyword indicating items to be implemented as defined by this standard.

**3.2.4.3 may:** A keyword that indicates flexibility of choice with no implied preference.

**3.2.4.4 N/A:** A keyword that indicates a field is not applicable and has no defined value and should not be checked by the host or device.

**3.2.4.5 obsolete:** A keyword indicating that the designated bits, bytes, words, fields, and code values that may have been defined in previous standards are not defined in this standard and shall not be reclaimed for other uses in future standards. However, some degree of functionality may be required for items designated as "obsolete" to provide for backward compatibility.

Obsolete commands should not be used by the host. Commands defined as obsolete may be command aborted by devices conforming to this standard. However, if a device does not command abort an obsolete command, the minimum that is required by the device in response to the command is command completion.

**3.2.4.6 optional:** A keyword that describes features that are not required by this standard. However, if any optional feature defined by the standard is implemented, the feature shall be implemented in the way defined by the standard.

**3.2.4.7 prohibited:** A keyword indicating that an item shall not be implemented by an implementation.

**3.2.4.8 reserved:** A keyword indicating reserved bits, bytes, words, fields, and code values that are set aside for future standardization. Their use and interpretation may be specified by future extensions to this or other standards. A reserved bit, byte, word, or field shall be cleared to zero, or in accordance with a future extension to this standard. The recipient shall not check reserved bits, bytes, words, or fields. Receipt of reserved code values in defined fields shall be treated as a command parameter error and reported by returning command aborted.

**3.2.4.9 retired:** A keyword indicating that the designated bits, bytes, words, fields, and code values that had been defined in previous standards are not defined in this standard and may be reclaimed for other uses in future standards. If retired bits, bytes, words, fields, or code values are used before they are reclaimed, they shall have the meaning or functionality as described in previous standards.

**3.2.4.10 shall:** A keyword indicating a mandatory requirement. Designers are required to implement all such mandatory requirements to ensure interoperability with other products that conform to this standard.

**3.2.4.11 should:** A keyword indicating flexibility of choice with a strongly preferred alternative. Equivalent to the phrase “it is recommended”.

**3.2.5 Numbering**


Numbers that are not immediately followed by a lowercase “b” or “h” are decimal values. Numbers that are immediately followed by a lowercase “b” (e.g., 01b) are binary values. Numbers that are immediately followed by a lowercase “h” (e.g., 3Ah) are hexadecimal values.

**3.2.6 Bit conventions**

Bit (n:m) denotes a set of bits, for example, bits (7:0).

**3.2.7 State diagram conventions**

State diagrams shall be as shown in Figure 2.

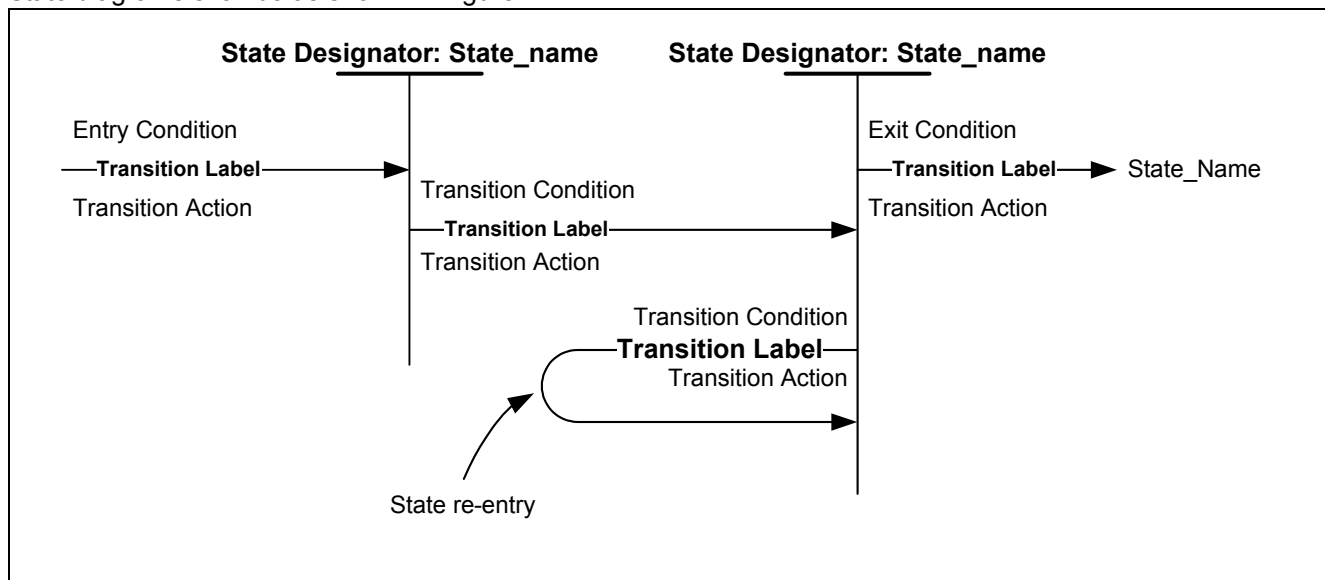

**Figure 2 — State diagram convention**

Each state is identified by a state designator and a state name. The state designator is unique among all states in all state diagrams in this document. The state designator consists of a set of letters that are capitalized in the title of the figure containing the state diagram followed by a unique number. The state name is a brief description of the primary action taken during the state, and the same state name may appear in other state diagrams. If the same primary function occurs in other states in the same state diagram, they are designated with a unique letter at the end of the name. Additional actions may be taken while in a state and these actions are described in the state description text.


Each transition is identified by a transition label and a transition condition. The transition label consists of the state designator of the state from which the transition is being made followed by the state designator of the state to which the transition is being made. In some cases, the transition to enter or exit a state diagram may come from or go to a number of state diagrams, depending on the command being executed. In this case, the state designator is labeled State\_name. The transition condition is a brief description of the event or condition that causes the transition to occur and may include a transition action, indicated in italics, that is taken when the transition occurs. This action is described fully in the transition description text.

Upon entry to a state, all actions to be executed in that state are executed. If a state is re-entered from itself, all actions to be executed in the state are executed again.

Transitions from state to state shall be instantaneous.

### 3.2.8 Byte, word, DWord, and QWord Relationships

Figure 3 illustrates the relationship between bytes, words, DWords, and QWords.

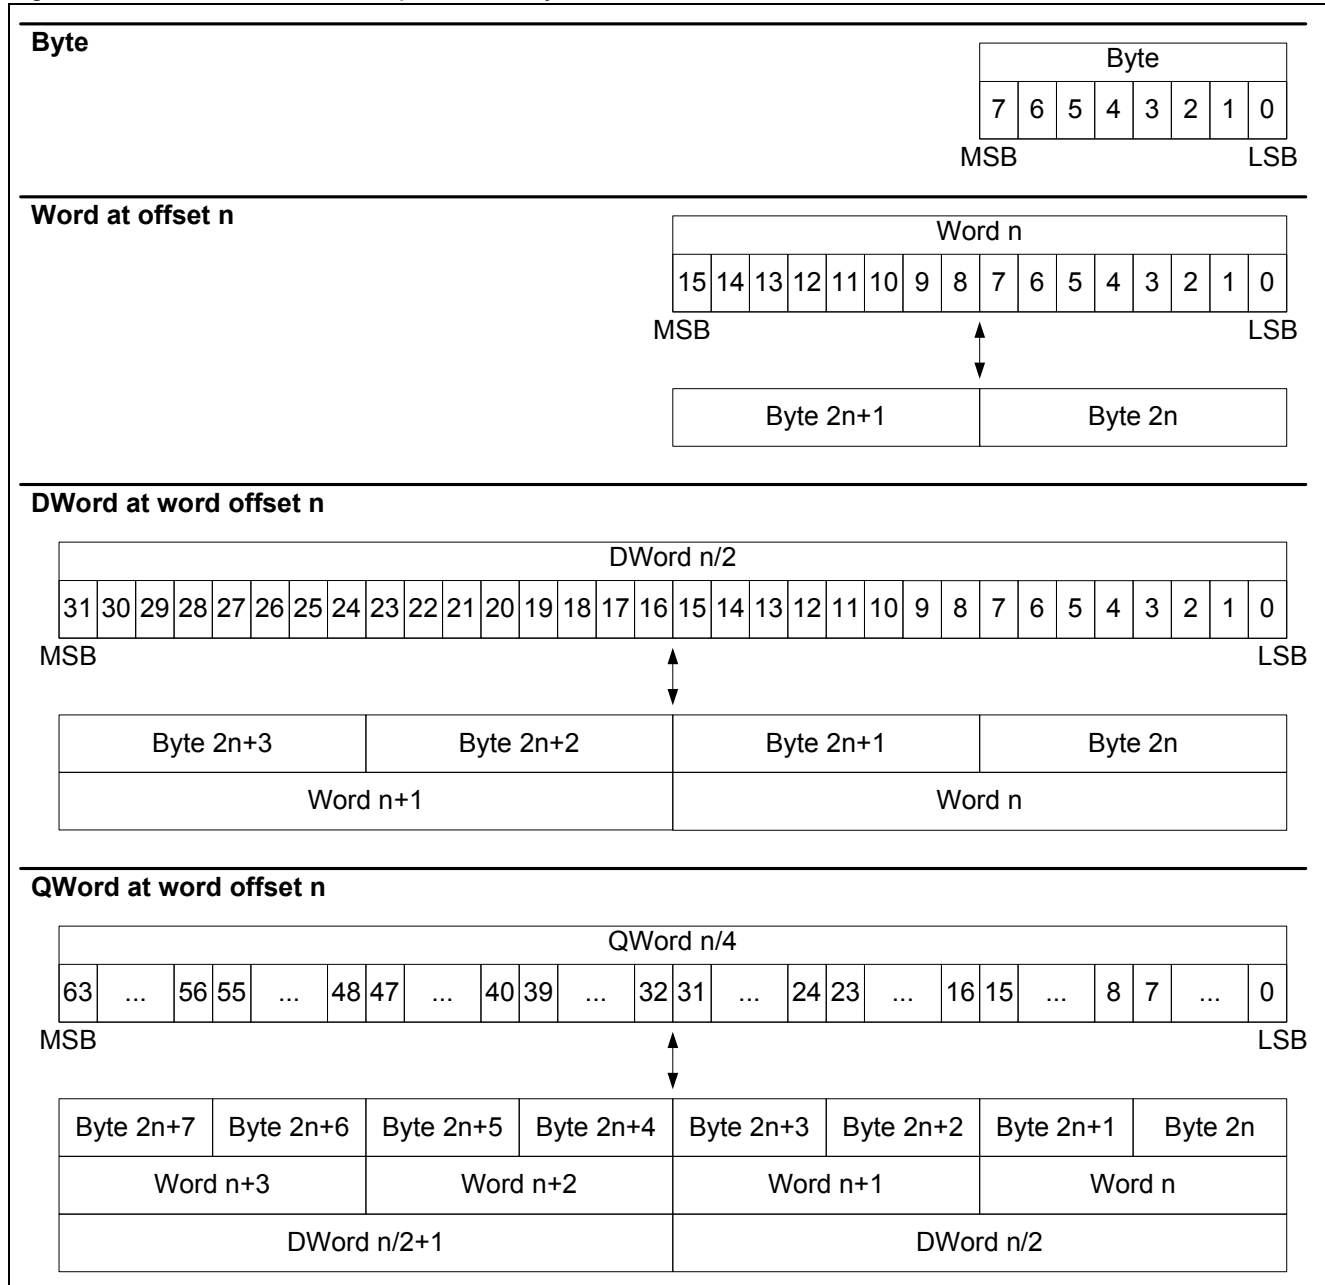

**Figure 3 — Byte, word, DWord and QWord relationships**

Unless stated or defined otherwise, in a field containing a multi-byte value (e.g., a word, DWord, or QWord), the byte containing the LSB is stored at the lowest offset and the byte containing the MSB is stored at the highest offset. Examples following this convention include:

- a) Device Configuration Identify data;
- b) IDENTIFY DEVICE data;
- c) IDENTIFY PACKET DEVICE data;
- d) Request Pin data, Cache Miss Data, Pin Set Data, and Remove Pin Data used by Non-Volatile Cache commands;
- e) Device SMART data;
- f) SCT status response and SCT command; and
- g) Logs;



For example:

- a) if the two-byte field (i.e., word) in SCT command word 0 contains 0007h, then:
  - A) byte 0 contains 07h; and
  - B) byte 1 contains 00h;
- b) if the four-byte field (i.e., DWord) at IDENTIFY DEVICE data words 60-61 contains 8001\_0203h (i.e., 2,147,549,699), then:
  - A) byte 120 contains 03h;
  - B) byte 121 contains 02h;
  - C) byte 122 contains 01h; and
  - D) byte 123 contains 80h;

and
- c) if an eight-byte field (i.e., QWord) in the WRITE SAME command words 2-5 contains 0000\_0504\_0302\_0100h, then:
  - A) byte 4 contains 00h;
  - B) byte 5 contains 01h;
  - C) byte 6 contains 02h;
  - D) byte 7 contains 03h;
  - E) byte 8 contains 04h;
  - F) byte 9 contains 05h;
  - G) byte 10 contains 00h; and
  - H) byte 11 contains 00h;

Exceptions to this convention include:

- a) each field containing an ATA string (e.g., the IDENTIFY DEVICE data and IDENTIFY PACKET DEVICE data Serial number, Firmware revision, and Model number fields) is considered to be an array of bytes, not a multi-byte value, and is handled as described in 3.2.9;
- b) the IDENTIFY DEVICE data and IDENTIFY PACKET DEVICE data World Wide Name field is treated as four word fields rather than one QWord field; and
- c) the CFA TRANSLATE SECTOR data LBA and logical sector write cycles count fields;
- d) the command packet in the PACKET command is formatted as defined by the applicable command standard); and
- e) parameter data in the TRUSTED RECEIVE, TRUSTED RECEIVE DMA, TRUSTED SEND, and TRUSTED SEND DMA commands is formatted as defined in those sections or in the standard defining the security protocol.

For example:

- a) if the two-byte field (i.e., a word) in TRUSTED RECEIVE parameter data for SP\_Specific=0000h contains 01FFh, then:
  - A) byte 6 contains 01h; and
  - B) byte 7 contains FFh;

and
- b) if a command packet in the PACKET command contains a SCSI INQUIRY command (see SPC-4) requesting the standard INQUIRY data with the allocation length field set to 01FFh, then:
  - A) byte 0 (i.e., the operation code field) contains 12h;
  - B) byte 1 (i.e., the byte containing the evpd bit) contains 00h;
  - C) byte 2 (i.e., the page code field) contains 00h;
  - D) byte 3 (i.e., the byte containing the MSB of the allocation length field) contains 01h;
  - E) byte 4 (i.e., the byte containing the LSB of the allocation length field) contains FFh;
  - F) byte 5 (i.e., the control field) contains 00h; and
  - G) if IDENTIFY PACKET DEVICE data word 0 bits 1:0 are set to 00b (i.e., 12 byte command packet), bytes 6 through 11 each contain 00h; and

if IDENTIFY PACKET DEVICE data word 0 bits 1:0 are set to 01b (i.e., 16 byte command packet), bytes 6 through 15 each contain 00h.

### 3.2.9 ATA string convention

ATA strings are sequences of bytes containing ASCII graphic characters in the range of 20h-7Eh. ATA strings shall not contain values in the range of 00h-1Fh or 7Fh-FFh.

Three fields in IDENTIFY DEVICE data and IDENTIFY PACKET DEVICE data contain ATA strings:

- a) Serial number (words 10-19);
- b) Firmware revision (words 23-26);
- c) Model number (words 27-46); and
- d) Current media serial number (words 176-205).

However, these ATA strings are not stored in the normal ASCII string format where byte offset 0 contains the first character, byte offset 1 contains the second character, etc. Each pair of bytes in ATA strings is swapped as shown in table 3.

**Table 3 — ATA string byte swapping**

Word	Byte	Character in string
0	0	Second character
	1	First character
1	2	Fourth character
	3	Third character
...	...	...
n	2n	Last character
	2n+1	Second-to-last character

For example, if the Firmware revision number field (words 23-26) contains the string “abcdefg” (including one padding space character at the end), its word and byte representations are shown in table 4.

**Table 4 — ATA firmware revision example**

Word	Value	Byte	Value
23	6162h (i.e., “ba”)	36	62h (i.e., ‘b’)
		37	61h (i.e., ‘a’)
24	6364h (i.e., “dc”)	38	64h (i.e., ‘d’)
		39	63h (i.e., ‘c’)
25	6566h (i.e., “fe”)	40	66h (i.e., ‘f’)
		41	65h (i.e., ‘e’)
26	6720h (i.e., “g”)	42	20h (i.e., ‘ ’, the space character)
		43	67h (i.e., ‘g’)

## 4 Mapping ATA Command Structure and Command Outputs into the Serial ATA transport

### 4.1 Mapping ATA8 Command Structure into an RHD FIS

In Serial ATA transport, a command is issued by transmitting a Register - Host to Device FIS (RDH FIS) from the Serial ATA host to a Serial ATA device (see ref. Serial ATA Revision 2.6). The inputs to the command are specified in the Command Structure (see ref. ATA8-ACS). The Command Structure is mapped into the Register - Host to Device FIS as described in table 5 and table 6.

**Table 5 — 28-Bit Command Mapping**

ACS Field	FIS Field	Comments
Feature (7:0)	Feature	
Count (7:0)	Sector Count	
LBA (7:0)	LBA Low	
LBA (15:8)	LBA Mid	
LBA (23:16)	LBA High	
LBA (27:24)	Device (3:0)	
Device (15:12)	Device (7:4)	
Command	Command	
Note 1 - SATA RHD FIS Fields Feature (exp), Sector Count (exp), LBA Low (exp), LBA Mid (exp), LBA High (exp) are not used in 28-bit commands		

**Table 6 — 48-Bit Command Mapping**

ACS Field	FIS Field	Comments
Feature (7:0)	Feature	
Feature (15:8)	Feature (exp)	
Count (7:0)	Sector Count	
Count (15:8)	Sector Count (exp)	
LBA (7:0)	LBA Low	
LBA (15:8)	LBA Mid	
LBA (23:16)	LBA High	
LBA (31:24)	LBA Low (exp)	
LBA (39:32)	LBA Mid (exp)	
LBA (47:40)	LBA High (exp)	
Device (15:12)	Device (7:4)	
Command	Command	
Note 1 - SATA RHD FIS Field Device (3:0) is not used in 28-bit commands		

## 4.2 Mapping ATA8 Normal Outputs and Error Outputs into a RDH FIS

In Serial ATA transport, a command status is returned by transmitting a Register - Device to Host FIS (RDH FIS), or under certain circumstances in case of NCQ commands, a Set Device Bits - Device to Host FIS (SDB FIS), from a Serial ATA device to the Serial ATA host (see ref. Serial ATA Revision 2.6). The command status is specified in the Normal Output or Error Output (see ref. ATA8-ACS), depending on whether the command completed without or with error. Table 7 and table 8 describe how to map the RDH FIS into the ATA-ACS Normal and Error Output structures.

**Table 7 — 28-Bit Normal/Error Mapping**

ACS Field	FIS Field	Comments
Error (7:0)	Error	Field is defined as reserved for Normal Outputs by ATA8-ACS
Count (7:0)	Sector Count	
LBA (7:0)	LBA Low	
LBA (15:8)	LBA Mid	
LBA (23:16)	LBA High	
LBA (27:24)	Device (3:0)	
Device (15:12)	Device (7:4)	
Status	Status	

Note 1 - SATA RDH FIS Fields Feature (exp), Sector Count (exp), LBA Low (exp), LBA Mid (exp), LBA High (exp) are not used in 28-bit commands. ATA8-ACS Error (15:8) is not used by this standard

**Table 8 — 48-Bit Normal/Error Mapping**

ACS Field	FIS Field	Comments
Error (7:0)	Error	.
Count (7:0)	Sector Count	
Count (15:8)	Sector Count (exp)	
LBA (7:0)	LBA Low	
LBA (15:8)	LBA Mid	
LBA (23:16)	LBA High	
LBA (31:24)	LBA Low (exp)	
LBA (39:32)	LBA Mid (exp)	
LBA (47:40)	LBA High (exp)	
Device (15:12)	Device (7:4)	
Command	Command	

Note 1 - SATA RDH FIS field Device (3:0) is not used for 48-bit commands. ATA8-ACS Error (15:8) is not used by this standard.

## 4.3 Mapping ATA8 Normal Outputs and Error Outputs into a SDB FIS

Under certain circumstances in case of NCQ commands, the SDB FIS is used to report the status. The intention is really not to report the status, but to update the SActive register at the host. The conditions under which Set SDBt FIS is used, the function and purpose of the SActive register, and how these relate to processing NCQ commands is fully documented in (see ref. Serial ATA Revision 2.6). The Error Output is mapped only partially into the SDB FIS as described in table 9.

**Table 9 — 48-Bit Queue Aborted Mapping**

ACS Field	FIS Field	Comments
Error (15:8)	Error	.
Status (7:0)	Status	
SActive (31:0)	SActive	





**Annex A**  
(Normative)

**Place Holder Annex**

**A.1 Overview**

Place Holder.

**Table A.1 — Sample Table**
